

EOS4 1355 XH

Order Code: 1310468

Body Detection Safety Light Curtain with Automatic/Manual Restart and EDM. Extended Range



Safety level

Type 4 - PL e

Protected height (mm)

1360

Resolution (mm)

50

Max. range (m)

20

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm

No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

Features

Safety level	Type 4 - PL e
Protected height (mm)	1360
Resolution (mm)	50
Controlled height (mm)	1350
Max. range (m)	20
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 20 ... 55
Response time (ms)	6,5
Number of beams	36
Max. length of the connection cables (m)	100
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector (receiver)
MTTFD (ISO13849) years	455,2
PFHD (IEC 61508)	1,31E-08
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated
Detection	Body

EOS4 1355 XH

Operating Range (m)	Selectable: 0 ... 10 m - low range / 3 ... 20 m - high range
---------------------	--

Protective enclosures	None
-----------------------	------

Packaging dimensions HxLxW (mm)	105 x 1490 x 160
------------------------------------	------------------

Product class	B
---------------	---

Custom tariff	85365019
---------------	----------

Electrical data

Power supply (VDC)	24 $\pm$ 20%
--------------------	--------------

Mechanical data

Overall height (mm)	1413
---------------------	------

Cross section dimensions (mm)	28 x 30
-------------------------------	---------


Degree of protection	IP65 - IP67
----------------------	-------------

Fastening	Back slot with set of LE type brackets (included) or to the top and lower end with swivel brackets SFB E (optional)
-----------	---

Technical drawings

A1 (Controlled height) = 1350 mm

A (Overall height) = 1413 mm

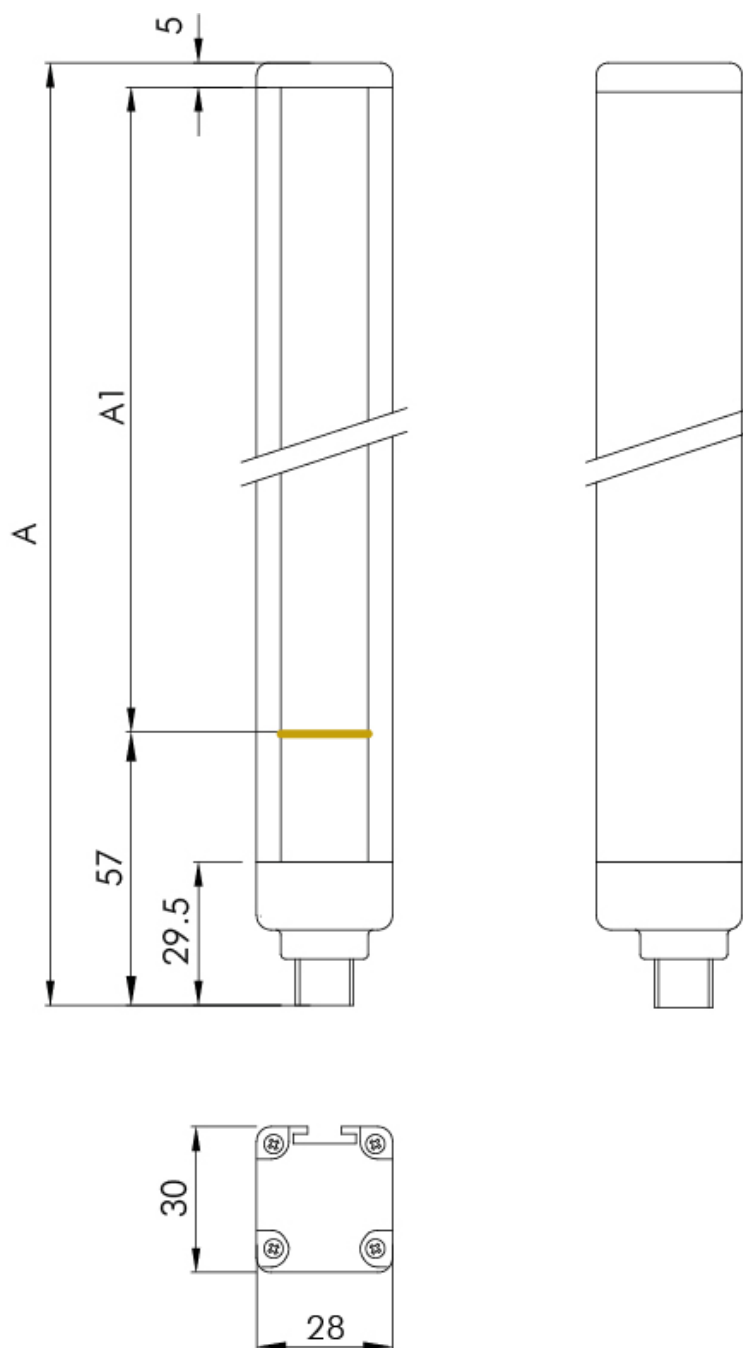

Certificates

