

SAFEGATE MA T4P TRX

Order Code: 1390805

Set of Muting Arms. T-Logic (Entry-Exit). 4 Parallel Beams



Max. range (m)

3.5

Functioning system

TRX (Transceiver)

Technical Description

Parallel beams Muting arms with 4 retro-reflective sensors

Can be used in conjunction with Safegate access control barriers to create a two-way access control system with entry-exit T-Muting logic

What's in the box: 4 Muting arms (active and passive elements) with pre-wired and pre-aligned Muting sensors, screws and fixing brackets

Features

Max. range (m)	3.5
Functioning system	TRX (Transceiver)
Operating temperature (°C)	- 30 ... 55
Muting logic	T (Two way) Logic with 4 parallel beams
Muting sensor field	Adjustable height and tilting
Characteristic output of Muting	PNP 100 mA at 24 VDC

sensors

Muting sensors	TRX Muting sensors arms with active and passive retro-reflector element
----------------	---

Integrated optoelectronic sensors 4 with parallel beams

Detection Access control

Protective enclosures None

Packaging dimensions HxLxW
(mm) 145 x 870 x 200

Product class A


Custom tariff 8538909999

Electrical data

Mechanical data

Fastening	Back slot, side slot with set of LL type brackets (included). SFB SG swivel brackets (optional)
-----------	--

Technical drawings

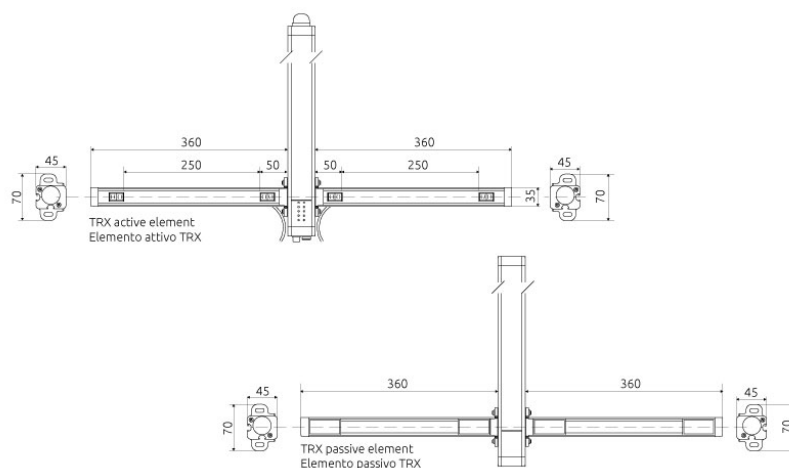

Certificates

